



## UC200


### The VoIP PBX for SME

UC200 is an IP telephony system, which is used to help small and medium-sized enterprises establish a convenient and high-efficient communication way.

The gateway provides 2 FXO ports and 2 FXS ports, and meanwhile it can be extended based on the Session Initiation Protocol (SIP). Interworking with FXO, GSM/3G/VoLTE and E1/T1 of various devices, it allows users to communicate through voice, fax, data or video.

Besides, UC200 supports VPN, encryption and security strategies, and thus ensures secure communication. It can be widely used in small and medium-sized call centers, enterprise branches to improve work efficiency and save communication cost.

### Product Pictures



Front View



Back View

### Key Features

- Supports up to 500 SIP users and 30 concurrent calls
- Supports 2 FXO and 2 FXS ports with lifeline capability
- Flexible dial rules based on time, number or source IP etc.
- Supports Multi-level IVR(Interactive Voice Response)
- Built-in VPN server/client
- Support voicemail/ Voice recording
- User-friendly web interface, classification of web user's rights

# UC200 VoIP PBX

## Physical Interfaces

- **FXS:** 2 \*FXS Ports
- **FXO:** 2 \* FXO Ports
- **USB Interface:** 1\* USB2.0
- **Ethernet Interfaces**  
1 WAN, 100/1000M, Base-T, RJ45  
1 LAN, 100/1000M, Base-T, RJ45
- **WiFi(Optional):** 2.4GHz & 5.8GHz
- **1\*SD card slot**
- 1\* Console port
- LED Indicators: PSTN Line, FXS, USB,SD,PWR/RUN

## FXS

- Connector: RJ11
- Caller ID: Bellcore Type 1&2, ETSI,BT,NTT and DTMF
- Answer and Disconnect Signaling: Answer, Disconnect, Busy Tone
- Polarity Reversal
- Hook Flash

## FXO

- Connector: RJ11
- Caller ID: FSK, DTMF
- Polarity Reversal
- Answer Delay
- Detection of Busy Tone
- Detection of No Current
- Auto Match of FXO Impedance

## Voice Capabilities

- VoIP Protocols: SIP over UDP/TCP/TLS,RTP/SRTP
- Codecs: G.711a/μ law,G.723.1, G.729A/B
- Silence Suppression
- Comfort Noise Generator(CNG)
- Voice Activity Detection(VAD)
- Echo Cancellation: G.168 with up to 128ms
- Dynamic Jitter Buffer
- Adjustable Gain Control
- Automatic Gain Control (AGC)
- Call Progress Tones: Dial Tone, Ring Back Tone, Busy Tone
- FAX: T.38 and Pass-through
- NAT: STUN/UPnP
- DTMF: RFC2833/Signal/Inband
- VPN Server/Client

# UC200 VoIP PBX

## PBX Services

- Call Forward (Unconditional/No Answer/Busy)
- Call Waiting
- Call Holding
- Call Transfer
- Hotline
- Do-not-disturb
- 3-Way Conference
- Ring Group
- Call Queue
- Routing Groups
- Caller/Called Number Manipulation
- Routing Based on Time Period
- Routing Based on Caller/Called Prefixes
- Routing Based on Source Trunks
- Dial Rules
- Failover Routing
- Multi-level IVR
- Auto-attendant Function
- CDRs
- Voicemail
- Local Recording (Support USB Storage)
- Up to 500 SIP Extensions
- Up to 30 Concurrent Calls
- Paging
- Event Report
- Email Client
- Voicemail to Email


## Maintenance

- Web GUI Configuration
- Telnet Management
- Configuration Restore/Backup
- Multiple Languages Supported
- HTTP/TFTP/FTP Firmware Upgrade
- Auto Provision
- Syslog
- Ping and Tracert
- Traffic Statistics: TCP,UDP,RTP
- Network Capture
- NTP
- Classification of Web Users' Rights
- HTTP&HTTPS/NATS API

## Environmental

- Power Supply: 12VDC, 2A
- Power Consumption: 18W
- Operating Temperature: 0 °C ~ 40 °C  
Storage Temperature: -10 °C ~90 °C
- Humidity: 10%-90% Non-Condensing
- Dimensions (W/D/H): 240×180×35mm
- Unit Weight: 1 kg

# UC200 VoIP PBX

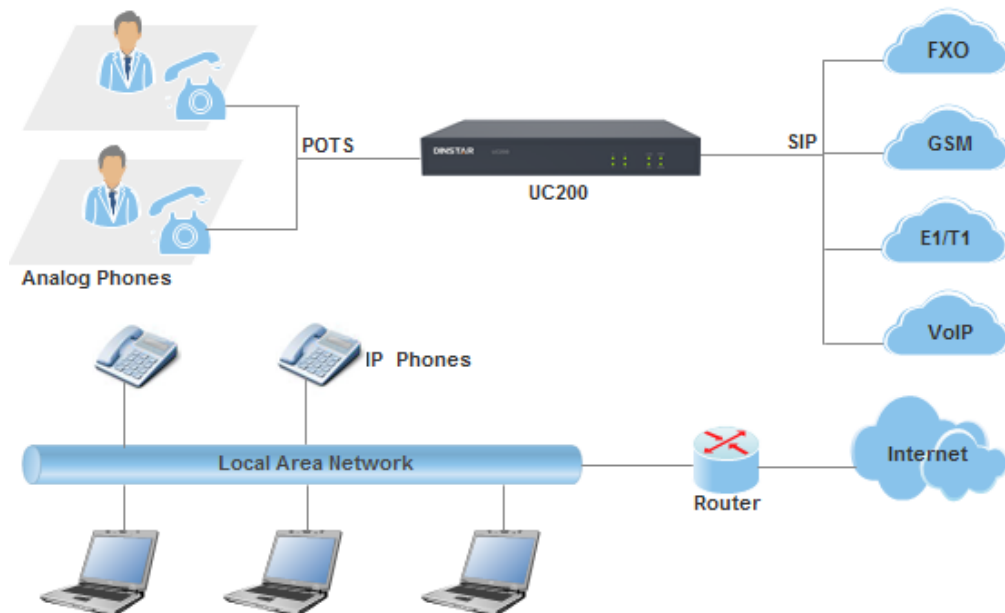

## About Us

Dinstar has the most complete VOIP gateway products line in China, which covered GSM/CDMA/LTE Wireless Gateway, E1/T1 Trunk Gateway, FXS/FXO Analog Gateway, Unified Communication gateway, SIMBANK and SIMCLOUD etc. Through our increasing innovation ability, excellent user experience, high performance-price ratio and tailored OEM/ODM service, Dinstar products and services have been widely deployed and recognized by telecom operators, system integrators, and enterprises around the world. With company culture of Honesty, Concentration, Innovation and Open-mind, our staffs gather and unify tightly as a team, aim to establish win-win relationships with our customers.

## Contact Us

**Shenzhen Dinstar Technologies Co., Ltd.**

9<sup>th</sup> Floor, Guoxing Building, Changxing Road, Nanshan District, Shenzhen,  
Guangdong, P.R.China, 518052

Tel.: +86 755 6191 9966 FAX: +86 755 2645 6659

Email: sales@dinstar.com [support@dinstar.com](mailto:support@dinstar.com)

Website: [www.dinstar.com](http://www.dinstar.com)